

## RS8000E

RS SERIES  
Residential/Commercial  
Portable Generators

Model 7951-0 UPC: 696471075823  
(49-State)


### Features

- **PowerDial™** integrates the start, run and stop functions into one simple-to-use dial, conveniently located for quicker startup and shut-down, eliminating the search for separate controls in an emergency.
- **Generac's 420cc OHV engine** with splash lubrication provides a long engine life.
- **Single touch electric start**, battery included, provides hassle-free start-up.
- **Low-oil shutdown** automatically safeguards engine from damage.
- **Covered outlets** provide added protection from the environment and rugged working conditions.
- **Hour Meter** tracks maintenance intervals.
- **1-¼ inch steel tube cradle** for added durability and strength.
- **Fold-down, locking handle** for sturdy portability and compact storage.
- **Large-capacity fuel tank** with incorporated fuel gauge provides durability and extended run times.
- **Heavy-duty, never-flat wheels** for reliable portability.
- **25ft Generator Cord** included, permits plugging in more devices with the multi-outlet generator cord.
- **HomeLink™** manual transfer switch compatible.



AC Rated Output Running Watts 8000  
AC Maximum Output Starting Watts 10000

### 49-State Control Panel

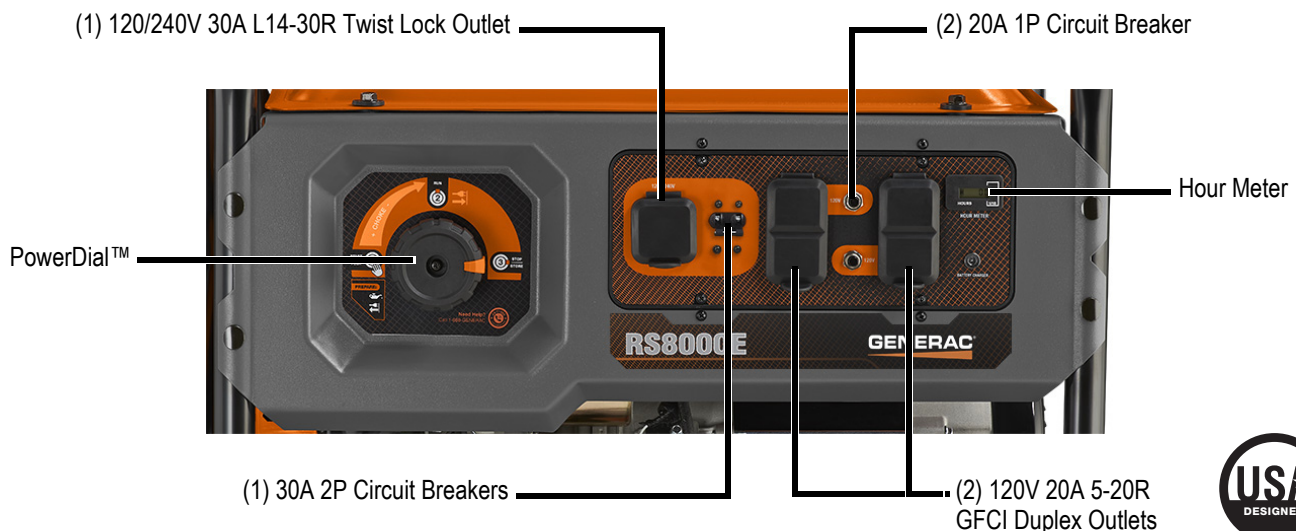

## RS8000E

### Specifications

Product Series	RS8000E
Model (Configuration)	7951-0 (EPA / 49ST)
AC Rated Output Running Watts	8000
AC Maximum Output Motor Starting Watts	10000
Rated AC Voltage	120/240 VAC
Rated AC Frequency	60 Hz
Rated VAC Amperage	66.6/33.3
Engine Displacement	420cc
Engine Type	OHV
Engine RPM	3600
Recommended Oil	10W-30 / SAE30
Oil Capacity qt (L)	1.06 (1.0)
Lubrication Method	Splash
Automatic Voltage Regulation (AVR)	Yes
Choke Location	PowerDial™
Fuel Shut Off	PowerDial™
Starting Method	Electric/Recoil Pull Start
Low Oil Shutdown Method	Low Level
Battery Included	Yes

Battery Type	Lead Acid (12VDC, 9AH)
Battery Part No.	0G9449
Battery Dimensions	5.94" x 2.56" x 3.70"
Battery Charger Input Jack	Included
Neutral Bonded to Ground	Yes
Start Switch Type	PowerDial™
Switch Location	PowerDial™
Fuel Gauge	Built-In Tank
Fuel Tank Capacity Gal (L)	7.5 (28.4)
Run Time at 50% (Hours)	10.5
Handle Style	Single Folding / Locking
Wheel Type	9.5" Solid Wheels
Maintenance Kit	Sold Separately
Warranty- Residential	3 Year Limited
Warranty- Commercial	1 Year Limited

### Dimensions and Weights

Length in (mm)	30 (762)
Width in (mm)	27.1 (689.2)
Height in (mm)	25.7 (652.7)
Extended Length in (mm)	44.9 (1141)
Carton Length in (mm)	31.5 (800.5)
Carton Width in (mm)	22.1 (560.5)
Carton Height in (mm)	24.5 (624)
Unit Weight lbs (kg)	213.8 (97)
Shipping Weight lbs (kg)	225 (102)

